


Eco line



Extrenal
Partial profile 60°

16 ER

Threading Inserts

AG60 16 ER AG60

ISO Metric 16 ER 1.5 ISO
2.0 ISO
2.5 ISO
3.0 ISO
4.0 ISO


P Steel	●	●	●
M Stainless steel	●	●	●
K Cast iron			
N Non-ferrous metal			
S Heat resistant alloy			
H Hardened steel			

			PVD		
			+	+	+
			KT 2405	KT 2415	KT 2615

Grade					
-------	--	--	--	--	--

			○	◎	○
--	--	--	---	---	---

			○	◎	○
			○	◎	○
			○	◎	○
			○	◎	○
			○	◎	○
			○	◎	○

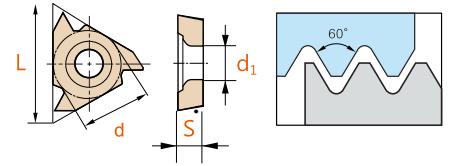


Size	L	d	S	d ₁
16	16.0	9.525	3.47	4.0

Pitch (mm)	Pitch (TPI)
--------------	---------------

0.5 - 3.0	48 - 8
-----------	--------

1.5		
2.0		
2.5		
3.0		
4.0		

Eco line



Internal
Partial profile 60°

16 IR

Threading Inserts

AG60 16 IR AG60

ISO Metric 16 IR 1.5 ISO
2.0 ISO
2.5 ISO
3.0 ISO
4.0 ISO


P Steel	●	●	●
M Stainless steel	●	●	●
K Cast iron			
N Non-ferrous metal			
S Heat resistant alloy			
H Hardened steel			

			PVD		
			+	+	+
			KT 2405	KT 2415	KT 2615

Grade					
-------	--	--	--	--	--

			○	◎	○
--	--	--	---	---	---

			○	◎	○
			○	◎	○
			○	◎	○
			○	◎	○
			○	◎	○
			○	◎	○

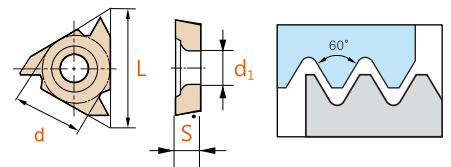

Size	L	d	S	d ₁
16	16.0	9.525	3.47	4.0

Pitch (mm)	Pitch (TPI)
--------------	---------------

0.5 - 3.0	48 - 8
-----------	--------

1.5		
2.0		
2.5		
3.0		
4.0		